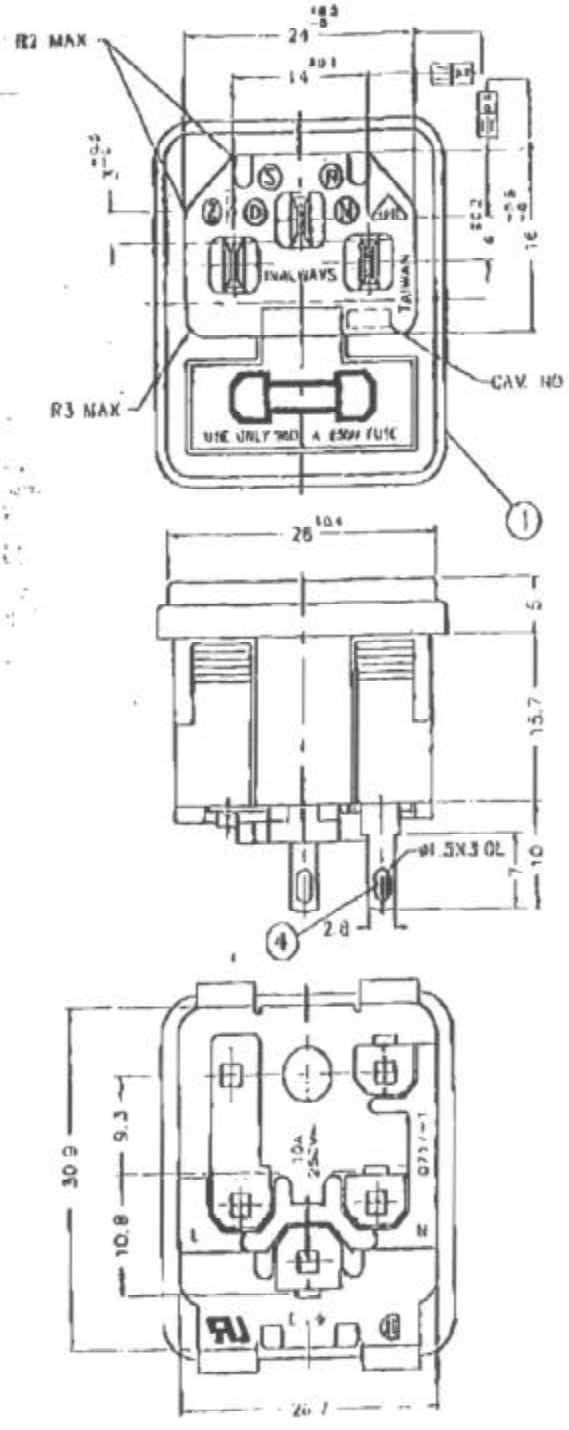

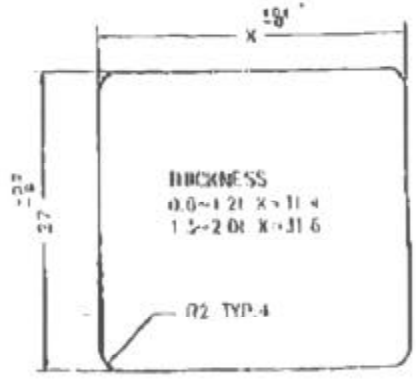

PANEL CUT-OUT

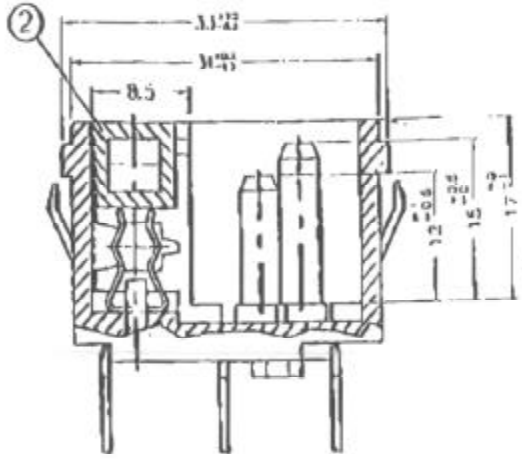



ALTERNATE TERMINAL



ALTERNATE TERMINAL



ALTERNATE TERMINAL

A. MATERIAL
1 HOUSING: NYLON 66 FLAMMABILITY UL 94V-2
(UL 94V-0 ON REQUEST)
2 TERMINAL: COPPER ALLOY

B. CHARACTERISTICS:
1 RATING: 10A 250V~
2 INSULATION RESISTANCE: OVER 100MΩ 500V DC
3 DIELECTRIC STRENGTH: 2000V AC ONE MINUTE
4 FUSE: ø5X20mm 250V AC 6.3A MAX.

C. APPROVALS:
UL, CSA, VDE, SEV, SEMKO, DEMKO, NEMKO & FIMKO

D. ORDERING OPTION GUIDE:

ORDER #	ITEM REQ'D	REFERENCES	
		MOUNTING HOLE	TERMINAL
0717-1-PS	①+②+③	SNAP IN TYPE	2.5 SOLDER TABS
0717-1-PL5	①+②+④	SNAP IN TYPE	2.8 SOLDER TABS
0717-1-PU	①+②+⑤	SNAP IN TYPE	4.8 SOLDER/QD TABS
0717-1-PW	①+②+⑥	SNAP IN TYPE	6.3 FAST ON/QD TABS

ITEM	PART NO.	PART NAME	Q'TY	SPECIFICATION	MATERIAL	REMARKS
⑥	F-17xx	TERMINAL	1 SET	6.3X0.8t	COPPER ALLOY	Ni PLATED
⑤	F-1701	TERMINAL	1 SET	4.8X0.8t	COPPER ALLOY	Ni PLATED
④	F-1A5H	TERMINAL	1 SET	2.8X0.8t	COPPER ALLOY	Ni PLATED
③	F-1751	TERMINAL	1 SET	2.5X0.8t	COPPER ALLOY	Ni PLATED
②	H-1831	FUSE HOLDER	1	ø5X20mm	THERMOPLASTIC	
①	H-17-1P1	HOUSING	1	SNAP IN TYPE	THERMOPLASTIC	

P/N. 117444

REV	DATE	ECN	DESCRIPTION
E			
D			
C	07-16-99	990427025	LOGO UPDATE
B	08-02-94	940801001	DIM CHANGE
A	10-18-93	RELEASE	

UNLESS OTHERWISE MARKED
DIMENSION: 0 ~ 6 ±0.1, 6 ~ 30 ±0.2, 30 ~ 120 ±0.3
ANGULAR: ±0.5°

PART NO.: 0717-1	NAME: AC IN/OUTLET W/ WITH FUSE HOLDER
MATERIAL: SEE ABOVE	SPEC.
APPROVED	CHECKED / DESIGNER / DATE